

TISPLUS 12-SLOT CARD READER

12-slot card reader for speedometer archiving

The TISPLUS 12-slot card reader in a 19 inch/ 1U housing for server rack installation is ideally suited for reading out smartcard business cards for management of the speedometer archive. Two LAN-to-USB adapters are integrated in the housing, to which 12 card readers are connected via USB hubs, thus 6 card readers per LAN connection.



ITEM NUMBER 21-09-UK12




Front



Back

AT A GLANCE

- Housing for installation in 19 inch server rack, 1 rack unit
- Front 12x smart card reader slots
- On the back 2x power supply and 2x LAN connections (LAN-A / B) for the LAN-to-USB adapter and the Smart Card Reader

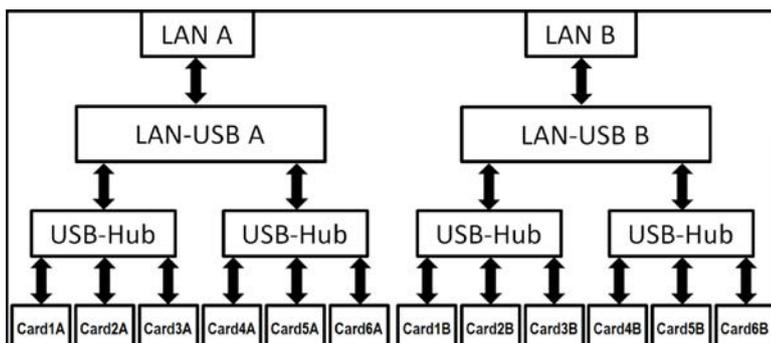

TECHNIAL SPECIFICATIONS

DIMENSIONS AND WEIGHT

482 x 45 x 260 mm (WxHxL)
2.7 kg

POWER SUPPLY

AC 100-240V 50/60Hz