

## TISPLUS SCAN HANDLE FOR ZEBRA TC7x

### 1. INSERTION

1. Take the TC7x and put it into the left holder of the handle.
2. Align the lower left side of the handle holder to the edge of the black TC7x rubber.
3. Now push the right side of the TC7x down and
4. move the handle a little bit forward until the lock catches snap into the holes at the TC7x battery release buttons.
5. Then push the right holder of the handle until it snaps over the right side of the TC7x.



**Now press down the left and right hand side of the retaining clip until it snaps.  
Ready!**

2. Align



4. Move till "snap"



5. Push



"click"



#### Note:

The TISPLUS Scan Handle is designed to carry the TC7x with mounted hand strap. For easy insertion please put the hand strap in a flat position.



For charging with mounted handle please push the hand strap in the upper position.



## TISPLUS SCAN HANDLE FOR ZEBRA TC7x

### 2. REMOVAL


Push the right holder of the handle until it moves above the right side of the TC7x. Turn the TC7x out of the handle.



### 3. PTT-BUTTON REMAPPING

The TIS Scan Handle uses the PTT-Button to trigger the scanner. Please remap the PTT-Button with the following instructions:

1. Start Settings->Key Programmer
2. Click on "BUTTON\_PTT"
3. Scroll up click on "Scan Button"
4. Ready, screenshot on the right shows the re-mapped PTT-Button for TIS Scan Handle usage

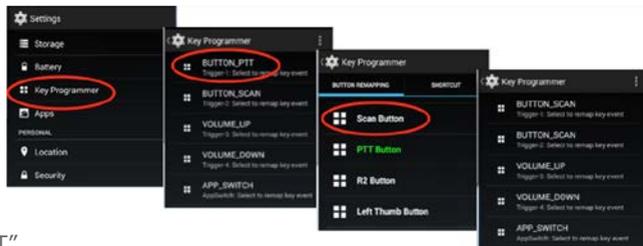

### 4. STYLUS MOUNTING



For easy access to the TC7x stylus the TIS Scan Handle provides a holder for the stylus and a hole to mount the stylus cord. The picture shows the TIS Scan Handle with mounted stylus.

### 5. CARE

**Do not use oil to lubricate the mechanism. Oil de-tracts plasticizers from the material, the plastic parts become brittle.**

Do not use harsh chemicals, cleaning solvents or strong detergents to clean the TISPLUS Scan Handle. Clean the TISPLUS Scan Handle with a damp cloth.